

Frese Frost Tap

Application

The Frese frost tap is an outdoor tap which can be installed in exterior walls 300 mm to 500 mm thick.

Combined model for handle or key. Simple shortening in one pipe only and with ceramic closure.

Has a built-in check valve in a frost-free location on the inner side of the wall, which prevents return flow in the absence of water pressure.


Technical Data





Housing:	Brass
Top Piece:	Brass
Handle:	Cyclac GPM 5500S
Pressure Class:	PN10
Medium temperature:	Max. 65° C
Approval:	VA-approval



Dimensions

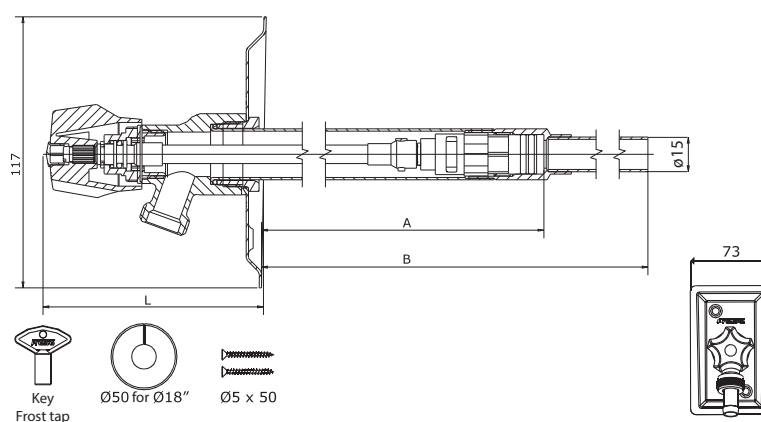
Size	DN15
L	95
A	290
B	550



Product programme	For walls 300 - 500 mm thick	Frese no.
	Frost tap with handle/key	29-2014
Tilbehør		Frese nr.
	Handle (ABS) - chrome plated	46-9006
	Ceramic element with spindle 300-500 mm	09-0956
	Key for frost tap	07-2623

Frese Frost Tap

Pressure Drop Graph

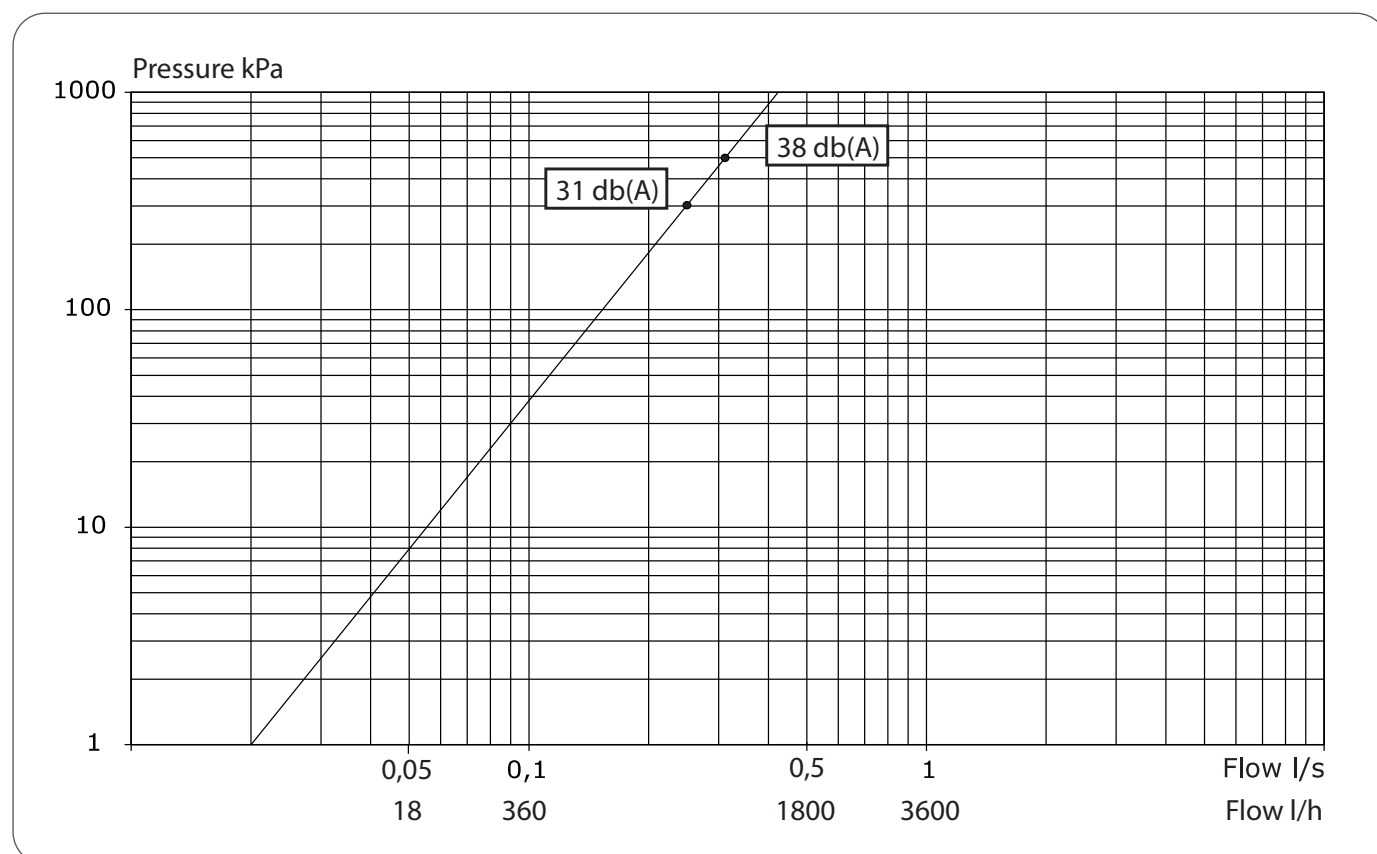

Installation

During installation, please ensure that excessive pressure does not build up. Excessive pressure (30 bar) can damage the ceramic closure.

The pressure in an isolated pipe section will rise dramatically as the water expands due to natural heating. Therefore there must always be a built-in safety system to equalise the pressure.

The ceramic closure must always be placed in a frost-free location on the inner side of the wall. **See the enclosed installation instructions.**

Frese A/S assumes no responsibility for errors, if any, in catalogues, brochures, and other printed matter. Frese A/S reserves the right to modify its products without prior notice, including already ordered products, if this does not alter existing specifications. All registered trademarks in this material are the property of Frese A/S. All rights reserved.

Frese A/S
Tel: +45 58 56 00 00
info@frese.dk