




	S231	S431	S531	S631	S731	S831
	DN8	DN10	DN13	DN15	DN20	DN25
Inside diameter hose	ø8.5 ±0,3	ø9.5 ±0,3	ø13 ±0,3	ø16 ±0,5	ø19 ±0,7	ø25 ±0,8
Outside diameter hose, without braiding	ø12 ±0,4	ø13,5 ±0,3	ø17 ±0,3	ø22 ±0,7	ø26 ±0,8	ø34 ±1,0
Brading	Stainless steel					
Work pressure	10 bar / +90°C					
Temperature	max. +90°C					
Minimum flow at 3 bar	28 l/min.	45 l/min.	60 l/min.	96 l/min.	145 l/min.	-
Approvals	VA (DK) - SITAC (S) - SINTEF (N) - DVGW (Germany)					

### Standard fittings:

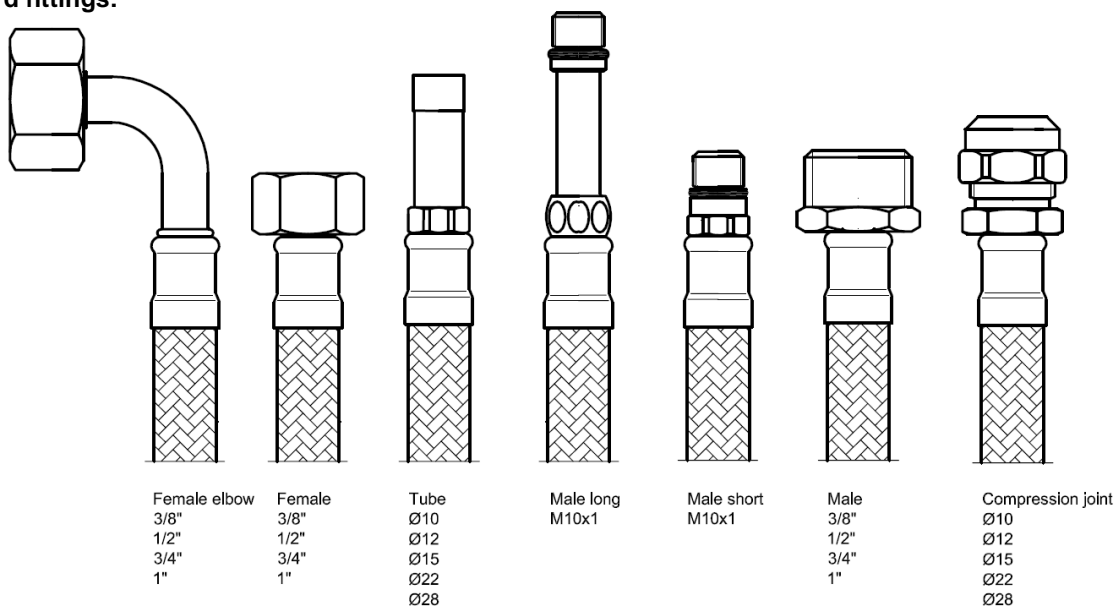

	Female elbow				Female				Tube					Male long	Male sh.	Male				Comp. Joint				
	3/8"	1/2"	3/4"	1"	3/8"	1/2"	3/4"	1"	Ø10	Ø12	Ø15	Ø22	Ø28	M10x1	M10x1	3/8"	1/2"	3/4"	1"	Ø10	Ø12	Ø15	Ø22	Ø28
DN08	X	X	X		X	X	X		X	X				X	X	X	X			X	X			
DN10	X	X	X		X	X	X		X												X			
DN13		X	X			X	X				X											X		
DN15			X				X				X											X		
DN20			X				X					X											X	
DN25				X			X					X							X					X

### Customized fitting on request.

Illustrations are only intended as a guide.  
 Technical data can be changed without notice

Rev. no.: 8  
 Rev. date: 16.02.2017/HK